


Everclear® Intercom

Car amplifier mounting in the car panel


The car speaker and amplifier are mounted on a 4" x 5" backing plate with a 3" round cutout for the speaker.

There must be no less than 1/2" space between the speaker and the amplifier board.

(1) Preferred mounting:
4 studs, 6-32 x .05 spaced 2.800" with a separate speaker grill. Discard the backing plate and mount the speaker with 4 standoffs (6 x 1.75") and the amplifier board on the studs.

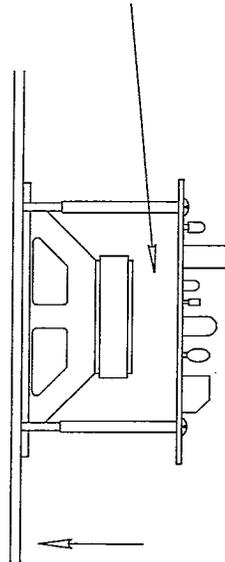

(2) Alternative mounting:
If the studs are in the wrong place, you can rotate the speaker/ amplifier unit and drill holes in the backing plate as shown.

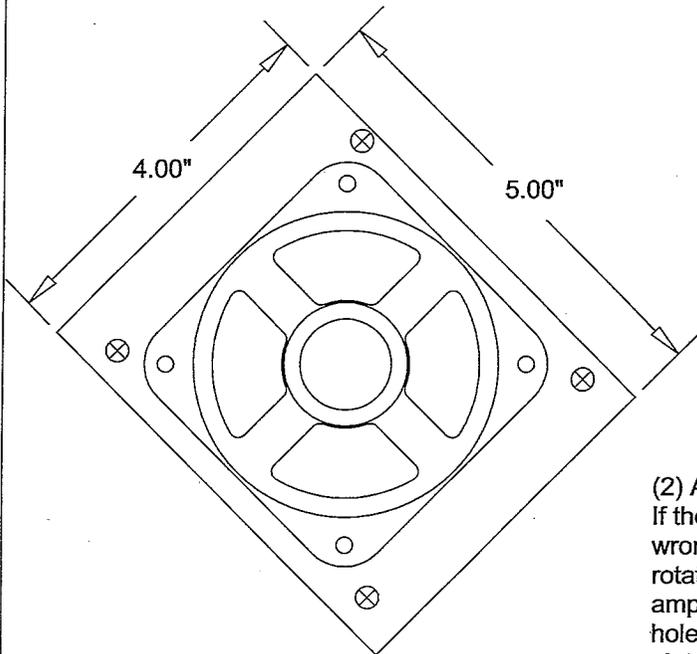


The in-use light requires a 3/8" hole on the same panel as the Help button. It can be field-drilled.

Everclear® Intercom


Optional ceiling enclosure mounting

The optional ceiling enclosure is a real labor saver for modernizations and when no provision has been made in the car panel for a speaker grill and mounting studs.

The brushed aluminum enclosure with #4 brushed stainless face plate can be mounted above or below the car ceiling as shown.

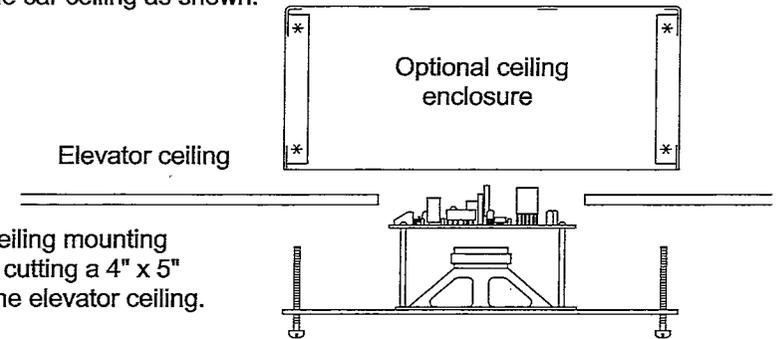

Above ceiling mounting requires cutting a 4" x 5" hole in the elevator ceiling.

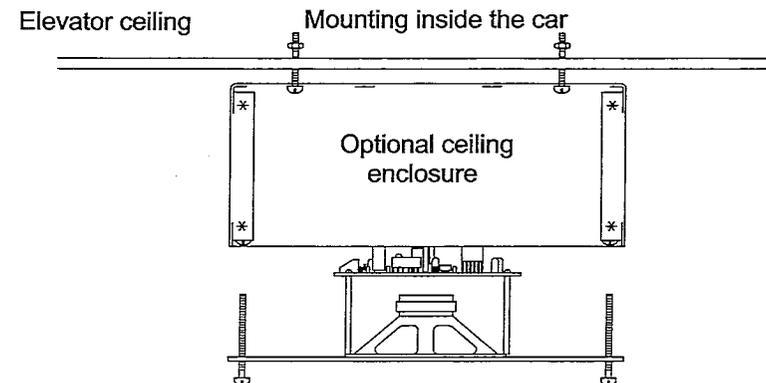

Additional technical information on the Everclear intercom can be found at www.everclear-intercom.com in the Prints & Specs section.

Everclear® Intercom

FilliPs LLC

425 277 1011

fax 425 277 5266

Car amplifier mounting

Enclosure Ceiling Mounting

Car station Mounting

11/01/10