


Everclear[®] Intercom In car amplifier, stud layout

The Everclear intercom requires a separate speaker from the telephone or other equipment.

This is the standard Everclear speaker grill.
You may use it or other approved design for a 3 1/2 " speaker.
Speaker cutout should be 3 ".

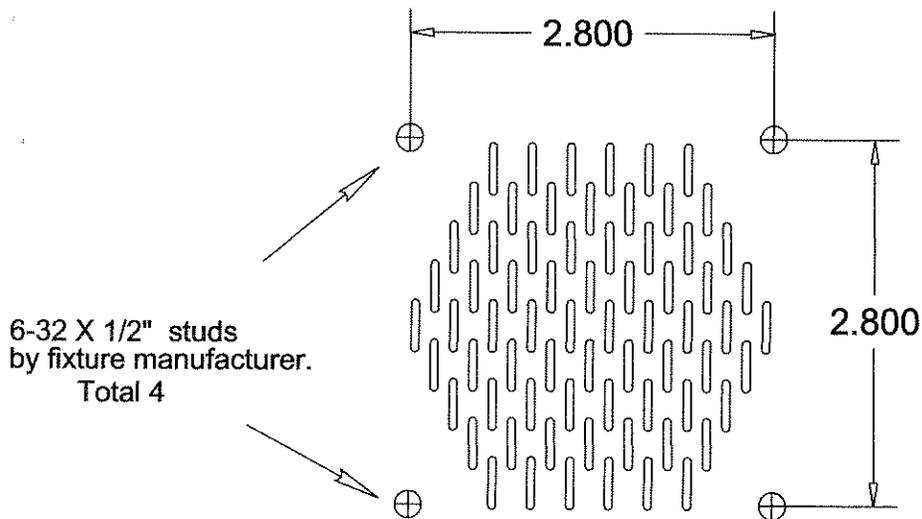

The in use light requires a 3/8 " hole on the same panel as the help button. It can be field drilled.

Everclear[®] Intercom

Fillips LLC

425 277 1011

fax 425 277 5266

In car amplifier



Speaker grill

7/12/07

Everclear[™] Intercom In car amplifier, C.O.P. mount

If the studs are not in the right location, you can rotate the speaker and drill holes in the plate.

You must have no less than 1/2" between the speaker to the amplifier board.

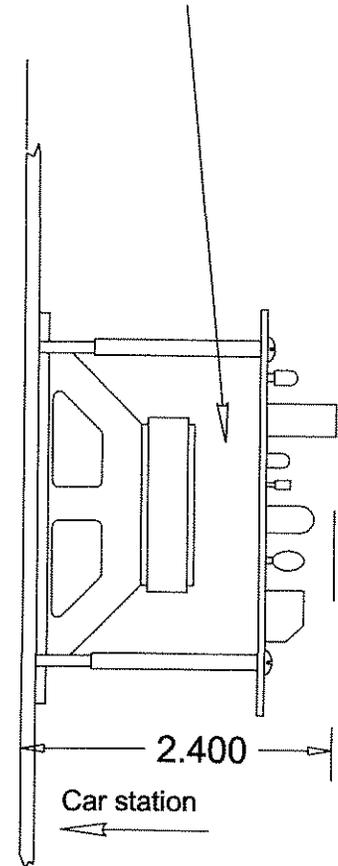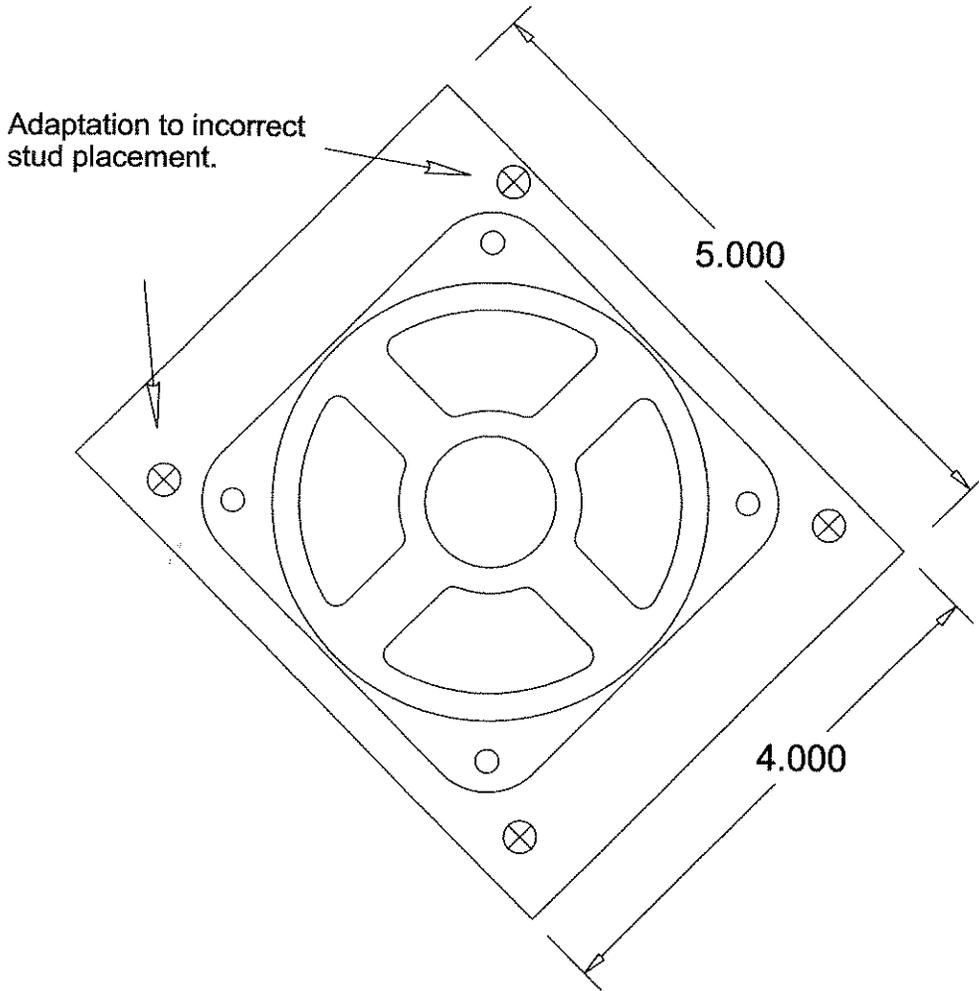

Backing plate is 4 " X 5 " with a 3 " round cutout for the speaker.

Preferred mounting: 4 studs, 6-32 x .05 spaced 2.800".

The in-car amplifier is mounted on a 4" x 5" backing plate. The backing plate may be discarded if studs are in the correct position, and the circuit board can be mounted on the same studs as the speaker with #6 x 1.75" M-F standoffs, total 4.

Everclear[®] Intercom

Phillips^{LLC}

425 277 1011

fax 425 277 5266

In car amplifier

C.O.P. Mounting

6/22/07